

FESTO

TOYOTA SA MOTORS (PTY) LTD
ATT ACCOUNTS PAYABLE DEPARTMENT
PROSPECTION ROAD
ISIPINGO BEACH
4133

For all requests please indicate customer number and delivery note number

Customer number	Delivery note number	Our Order number	Festo consultant
0017030223	FES 1162618809	2170623123	David Sethlake

Delivery note
1162618809

Date
23 April 2018

No of pages
4 of 4

Contact Department
Mr. L. Kirk

Didactic
Phone ++27 (0) 11-971-558
Fax ++27 (0) 11-974-902
lucian.kirk@festo.com

Description	Part number	Qty.	Net price per unit
red, blue and black Complete set, consisting of 106 safety laboratory cables with 4 mm safety plugs in the colours red, blue and black: - 10x red 50 mm - 10x blue 50 mm - 8x black 50 mm - 8x red 300 mm - 8x blue 300 mm - 18x black 300 mm - 8x red 500 mm - 8x blue 500 mm - 18x black 500 mm - 2x red 1000 mm - 3x blue 1000 mm - 2x black 1000 mm - 1x red 1500 mm - 1x blue 1500 mm - 1x black 1500 mm - Plugs with rigid protective sleeve and axial socket - Conductor cross section: 1 mm ² - Rated current: 16 A			

Toyota Technical Training
24 Prospection Road
Isipingo Beach,
4115

Last delivery

Number of packages 1
Total weight 18,009 KG

Your signature signifies that the goods were sold in accordance with our conditions of sale, which are printed on the reverse side hereof.
Interest at 2% per month will be charged on all overdue accounts.
Goods may only be returned for credit by prior arrangement and are subject to handling charges unless due to supplier error.

Received by

Kuan NIEKEUC
Name


Signature

26/04/2018
Date

FESTO

TOYOTA SA MOTORS (PTY) LTD
ATT ACCOUNTS PAYABLE DEPARTMENT
PROSPECTION ROAD
ISIPINGO BEACH
4133



FES1162618809

For all requests please indicate customer number and delivery note number			
Customer number	Delivery note number	Our Order number	Festo consultant
0017030223	FES1162618809	2170623123	David Sethlake

Delivery note
1162618809

Date
23 April 2018

No of pages
4 of 4

Contact Department
Mr L. Kirk

Didactic
Phone ++27 (0) 11 971-558
Fax ++27 (0) 11-974-902
lucian.kirk@festo.com

Description	Part number	Qty	Net price per unit
red, blue and black Complete set, consisting of 106 safety laboratory cables with 4 mm safety plugs in the colours red, blue and black - 10x red 50 mm - 10x blue 50 mm - 8x black 50 mm - 8x red 300 mm - 8x blue 300 mm - 18x black 300 mm - 8x red 500 mm - 8x blue 500 mm - 18x black 500 mm - 2x red 1000 mm - 3x blue 1000 mm - 2x black 1000 mm - 1x red 1500 mm - 1x blue 1500 mm - 1x black 1500 mm - Plugs with rigid protective sleeve and axial socket - Conductor cross section: 1 mm ² - Rated current: 16 A			

Toyota Technical Training
24 Prospecton Road
Isipingo Beach
4115

Last delivery	
Number of packages	1
Total weight	18,009 KG
Your signature signifies that the goods were sold in accordance with our conditions of sale, which are printed on the reverse side hereof	
Interest at 2% per month will be charged on all overdue accounts	
Goods may only be returned for credit by prior arrangement and are subject to handling charges unless due to supplier error	

Received by

KUAN NIEKENG
Name


Signature

Date

26/04/2018

FESTO

TOYOTA SA MOTORS (PTY) LTD
ATT ACCOUNTS PAYABLE DEPARTMENT
PROSPECTION ROAD
ISIPINGO BEACH
4133

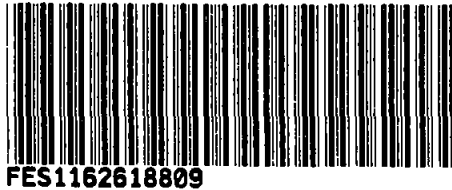

FES1162618809

For all requests please indicate customer number and delivery note number

Customer number	Delivery note number	Our Order number	Festo consultant
0017030223	FES 1162618809	2170623123	David Sethlake

Delivery note
1162618809

Date
23 April 2018

No of pages
3 of 4

Contact Department
Mr L Kirk

Didactic
Phone ++27 (0) 11-971-558
Fax ++27 (0) 11-974-902
lucian.kirk@festo.com

Description	Part number	Qty	Net price per unit
changeover switch, using the 4 mm safety sockets integrated in the quick action mounting system Quick-Fix®. - Possible contact load, maximum 5 A			
Item 0060 D TP-BG-SEU-Q4 Poppet valve, reduced noise level through a built-in silencer. Precision, quick action push/pull connector for plastic tubing PUN-4 x 0,75 for inside/outside calibrated tubes, and secure click-on system Quickfix for the profile plates Pressure range. 50 to 1000 kPa (0,5 to 10 bar) Nominal flow rate. 1 (P) "l/min, 2 (A)"	539772	6	
Item 0080 D:TP-BG-SMT-DID Prox sensor	2344752	8	
Item 0090 D:SEN-BG-SOEG-RT-M12-PS-B 4 Proximity sensor, optical, M12 Proximity sensor with protection against polarity reversal, overload and short circuit - M12 design - 360° rotatable, detenting every 15° - Connection via the 4 mm safety connectors integrated in the Quick-Fix® quick connector system - Power supply 10 - 30 V DC - N/O contact (PNP) starting function - Quick-Fix® quick connector system Adjustable sensing distance of 70 - 300 mm, with LED	572744	8	
Item 0100 D AS-KS-SSTK-4MM-SBU Safety laboratory cables, 106 pieces,	571806	1	

FESTO

TOYOTA SA MOTORS (PTY) LTD
ATT ACCOUNTS PAYABLE DEPARTMENT
PROSPECTION ROAD
ISIPINGO BEACH
4133



For all requests please indicate customer number and delivery note number

Customer number	Delivery note number	Our Order number	Festo consultant
0017030223	FES 1162618809	2170623123	David Sethlake

Delivery note
1162618809

Date
23 April 2018

No of pages
2 of 4


Contact Department
Mr L Kirk
Didactic
Phone ++27 (0) 11-971-558
Fax ++27 (0) 11-974-902
lucian.kirk@festo.com

Description	Part number	Qty	Net price per unit
140 N			
Item 0030 D-TP-BG-VUVG-B52-QS4 Pilot actuated, double solenoid piston spool valve with non-detenting and detenting manual override, and LED - Electrical connection via integrated 4 mm safety sockets - 24 V DC power supply - Response time 7 ms - Pneumatic connection via QS-4 push-in fitting - Operating pressure 150 – 800 kPa (1.5 – 8 bar) - Quick-Fix® safety and quick action mounting system for slotted profile plates	567200	20	
Item 0040 D S-ESG-A-L-SIBU Consisting of a mechanically operated micro switch, roller lever operated with return spring, 1 change over switch multifunctional electric ports for 4 mm security plugs. Secure click-on system with integrated swivel function for the profile plates for individual adjustment. Voltage 24 V Contact load: max 5A Switching frequency: max 200 Hz Repeatable switching precision: 0,2 mm Operating path 2,7 mm Actuating force: 5N	183322	12	
Item 0050 D:S-ESG-A-R-SIBU Limit switch, electrical, right-actuated The micro switch is actuated mechanically when the roller lever is pressed, for example by the trip cam of a cylinder. The micro switch can be wired as a N/O contact, N/C contact or a	183345	12	

58 X 38 X 40 - 20kg

*** COPY *****FESTO**

TOYOTA SA MOTORS (PTY) LTD
ATT ACCOUNTS PAYABLE DEPARTMENT
PROSPECTION ROAD
ISIPINGO BEACH
4133

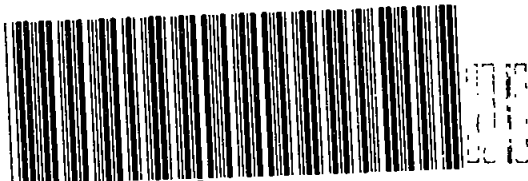**FES1162618809**

For all requests please indicate customer number and delivery note number

Customer number	Delivery note number	Our Order number	Festo consultant
0017030223	FES 1162618809	2170623123	David Sethlake

Shipping type	Packed by	Checked by
21 / Carrier		
Sales Office	Time	
1701 Gauteng	16:12	

Delivery note
1162618809

Date
23 April 2018

No of pages
1 of 4

Your order 4501679239 of 23 03 2018

Please deliver to

Toyota SA Motors
TSAM Assembly Plant
TSM, 11 Prospection Road,
Isipingo Beach, 4115

With reference to Quotation 2171226517 and 2171234119

Please deliver to

Toyota SA Motors
TSAM Assembly Plant
TSM, 11 Prospection Road,
Isipingo Beach, 4115

With reference to Quotation: 2171226517 and 2171234119

Contact Department
Mr L Kirk
Didactic
Phone ++27 (0) 11-971-558
Fax ++27 (0) 11-974-902
lucian.kirk@festo.com

Reg No 1973/003776/07
VAT Reg No 4350101004

Directors
Mr KJM Heckl * Mr J Naumburger*
B C Wallace (Managing)
*German

Regional Offices at

Bloemfontein
Cape Town
Durban
East London
Pietermaritzburg
Port Elizabeth
Pretoria
Vereeniging

Festo (Pty) Ltd.
Head Office, Johannesburg
22 26 Electron Ave Isando
P O Box 255, 1600
Republic of South Africa
Phone +27(0)11-971 5500
Fax +27(0)11-974 2157

Description	Part number	Qty	Net price per unit
Item 0020 D S-PAZ-DW20-100PPV Double-acting cylinder Piston cylinder, piston rod and cylinder barrel are made of stainless steel with control cam and solenoid piston. Precision, quick action push/pull connector for plastic tubing PUN-4 x 0,75 for inside/outside calibrated tubes, and secure click-on swiveling system for the profile plates to enable individual adjustment - Operating pressure max . 1000 kPa (10 bar) - Stroke length 100 mm - Thrust at 600 kPa: 6 bar, 165 N - Return thrust at 600 kPa, 6 bar,	152888	12	

58 X 38 X 40 - 20kg

*** COPY ***



0017030223 1162618809 0001

FESTO

TOYOTA SA MOTORS (PTY) LTD
ATT ACCOUNTS PAYABLE DEPARTMENT
PROSPECTION ROAD
ISIPINGO BEACH
4133



For all requests please indicate customer number and delivery note number

Customer number 0017030223	Delivery note number 1162618809	Our Order number 2170623123	Festo consultant David Sethlake
-------------------------------	------------------------------------	--------------------------------	------------------------------------

Shipping type 21 / Carrier	Packed by	Checked by
-------------------------------	-----------	------------

Sales Office 1701 Gauteng	Time 16:12
------------------------------	---------------

Delivery note
1162618809

Date
23 April 2018

No of pages
1 of 4

Your order 4501679239 of 23.03.2018

Please deliver to

Toyota SA Motors
TSAM Assembly Plant
TSM, 11 Prospecton Road,
Isipingo Beach, 4115

With reference to Quotation: 2171226517 and 2171234119

Please deliver to

Toyota SA Motors
TSAM Assembly Plant
TSM, 11 Prospecton Road,
Isipingo Beach, 4115

With reference to Quotation: 2171226517 and 2171234119

Contact Department
Mr. L. Kirk
Didactic
Phone ++27 (0) 11-971-558
Fax ++27 (0) 11-974-902
lucian.kirk@festo.com

Reg. No. 1973/003776/07
VAT Reg. No. 4350101004

Directors:
Mr. KJM Heckl.* Mr. J Naumburger*
B.C. Wallace (Managing)
*German

Regional Offices at:

Bloemfontein
Cape Town
Durban
East London
Pietermaritzburg
Port Elizabeth
Pretoria
Vereeniging

Festo (Pty.) Ltd.
Head Office, Johannesburg
22 - 26 Electron Ave. Isando
P.O.Box 255, 1600
Republic of South Africa
Phone +27(0)11-971-5500
Fax +27(0)11-974-2157

Description	Part number	Qty.	Net price per unit
Item 0020 D:S-PAZ-DW20-100PPV Double-acting cylinder Piston cylinder, piston rod and cylinder barrel are made of stainless steel with control cam and solenoid piston. Precision, quick action push/pull connector for plastic tubing PUN-4 x 0,75 for inside/outside calibrated tubes, and secure click-on swiveling system for the profile plates to enable individual adjustment - Operating pressure max.: 1000 kPa (10 bar) - Stroke length: 100 mm - Thrust at 600 kPa: 6 bar, 165 N - Return thrust at 600 kPa: 6 bar,	152888	12	

TOYOTA SA MOTORS (PTY) LTD
ATT ACCOUNTS PAYABLE DEPARTMENT
PROSPECTION ROAD
ISIPINGO BEACH
4133

For all requests please indicate customer number and delivery note number			
Customer number 0017030223	FES Delivery note number 1162618809	Our Order number 2170623123	Festo consultant David Sethlake

Delivery note
1162618809

Date
23 April 2018

No of pages
2 of 4

Contact Department
Mr. L. Kirk
Didactic
Phone ++27 (0) 11-971-558
Fax ++27 (0) 11-974-902
lucian.kirk@festo.com

Description	Part number	Qty.	Net price per unit
140 N Item 0030 D:TP-BG-VUVG-B52-QS4 Pilot actuated, double solenoid piston spool valve with non-detenting and detenting manual override, and LED. - Electrical connection via integrated 4 mm safety sockets - 24 V DC power supply - Response time 7 ms - Pneumatic connection via QS-4 push-in fitting - Operating pressure 150 – 800 kPa (1.5 – 8 bar) - Quick-Fix® safety and quick action mounting system for slotted profile plates	567200	20	
Item 0040 D:S-ESG-A-L-SIBU Consisting of a mechanically operated micro switch, roller lever operated with return spring, 1 change over switch multifunctional electric ports for 4 mm security plugs. Secure click-on system with integrated swivel function for the profile plates for individual adjustment. Voltage: 24 V Contact load: max. 5A Switching frequency: max. 200 Hz Repeatable switching precision: 0,2 mm Operating path: 2,7 mm Actuating force: 5N	183322	12	
Item 0050 D:S-ESG-A-R-SIBU Limit switch, electrical, right-actuated The micro switch is actuated mechanically when the roller lever is pressed, for example by the trip cam of a cylinder. The micro switch can be wired as a N/O contact, N/C contact or a	183345	12	

FESTO

TOYOTA SA MOTORS (PTY) LTD
ATT ACCOUNTS PAYABLE DEPARTMENT
PROSPECTION ROAD
ISIPINGO BEACH
4133

For all requests please indicate customer number and delivery note number

Customer number	Delivery note number	Our Order number	Festo consultant
0017030223	FES 1162618809	2170623123	David Sethlake

Delivery note
1162618809

Date
23 April 2018

No of pages
3 of 4

Contact Department
Mr. L. Kirk

Didactic
Phone ++27 (0) 11-971-558
Fax ++27 (0) 11-974-902
lucian.kirk@festo.com

Description	Part number	Qty.	Net price per unit
changeover switch, using the 4 mm safety sockets integrated in the quick action mounting system Quick-Fix®. - Possible contact load: maximum 5 A			
Item 0060 D:TP-BG-SEU-Q4 Poppet valve, reduced noise level through a built-in silencer. Precision, quick action push/pull connector for plastic tubing PUN-4 x 0,75 for inside/outside calibrated tubes, and secure click-on system Quickfix for the profile plates Pressure range: 50 to 1000 kPa (0,5 to 10 bar) Nominal flow rate: 1 (P) "l/min; 2 (A)"	539772	6	
Item 0080 D:TP-BG-SMT-DID Prox. sensor	2344752	8	
Item 0090 D:SEN-BG-SOEG-RT-M12-PS-B 4 Proximity sensor, optical, M12 Proximity sensor with protection against polarity reversal, overload and short circuit. - M12 design - 360° rotatable, detenting every 15° - Connection via the 4 mm safety connectors integrated in the Quick-Fix® quick connector system - Power supply 10 - 30 V DC - N/O contact (PNP) starting function - Quick-Fix® quick connector system Adjustable sensing distance of 70 - 300 mm, with LED	572744	8	
Item 0100 D:AS-KS-SSTK-4MM-SBU Safety laboratory cables, 106 pieces,	571806	1	